Visite la página TRAXXAS.com/manuals para descargar el instrucciones en su idioma.

Auf TRAXXAS.com/manuals können Sie anleitung in Ihrer Sprache downloaden.

Roof Skid Plate & Tailgate Protector Installation Instructions

Covers Part #10717-BLK, 10717-BLUE, 10717-GRN, 10717-ORNG, 10717-RED

Kit contents:
- Roof skid plates (left & right)
- Skid plate mount
- Tailgate protector
- Tailgate protector mount
- 3x8mm button-head cap screws (BCS) (7)
- Body cutting template

Tools needed:
- 2.0mm hex wrench
- Tapered body reamer (part #3433 or #3433X, sold separately)

CAUTION: RISK OF INJURY!
Use care with hobby knives, tapered reamers, and other cutting tools as they are extremely sharp and can cause severe injury, deep cuts, and/or punctures.

1
Remove the rear clipless latch and mount.

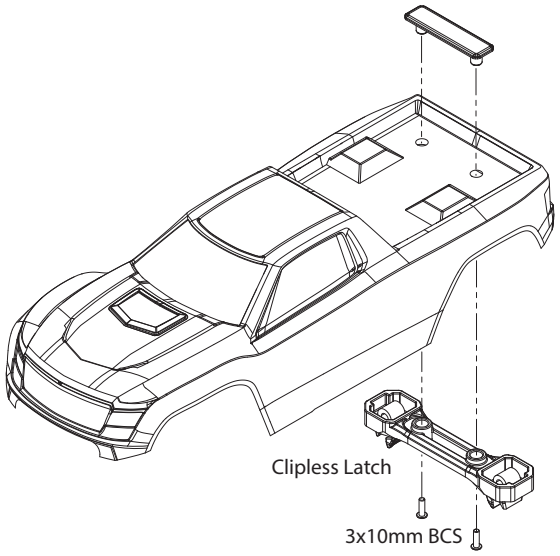

2

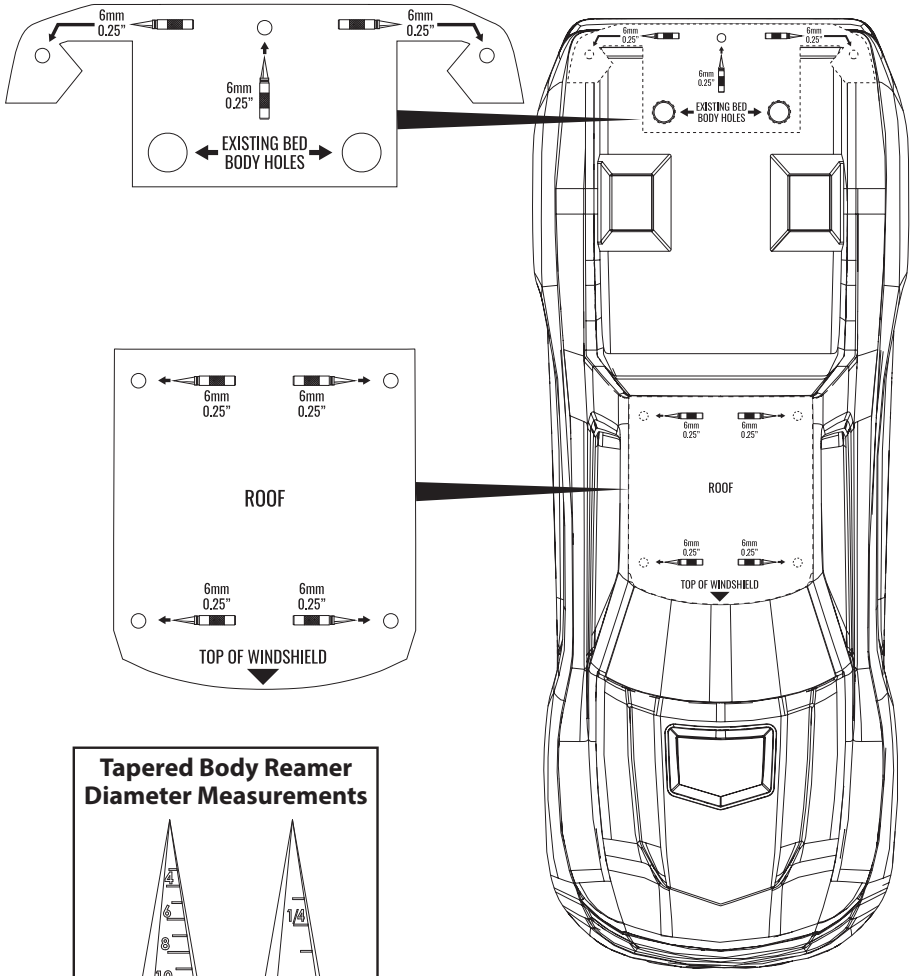

Tapered Body Reamer Diameter Measurements

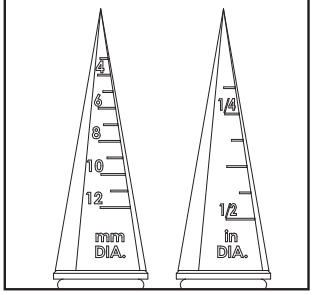

Body modification:
Before installation of the roof skid plates and tailgate protector, the vehicle body will need modification. Peel the backing from the included self-adhesive cutting templates. Install the roof template on the body, aligning the front edge of the template with the top of the windshield as shown. Install the tailgate template on the body, aligning the larger holes in the template with the existing holes in the truck bed as shown. Using a tapered body reamer, carefully cut holes for the screw bosses on the skid plates and tailgate protector *(note the hole diameters indicated on the template and the corresponding diameter measurements on the body reamer)*.

3
Install the roof skid plates and tailgate protector using the included 3x8mm BCS. Reinstall the clipless latch and mount removed in Step 1.

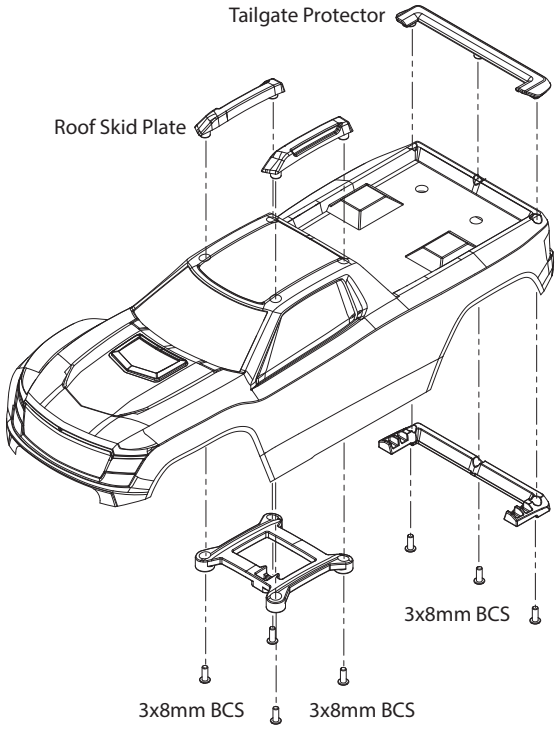

Traxxas, 6250 Traxxas Way, McKinney, TX 75070, Phone: 972-549-3000, Fax: 972-549-3011, e-mail: support@Traxxas.com

Rev 00 251013