Descargue las instrucciones en su idioma.

Laden Sie die Anleitung in Ihrer Sprache herunter.

GTS Shock Rebuild Instructions

Covers Parts #8160, 8160A, 8160X

Shock Assembly

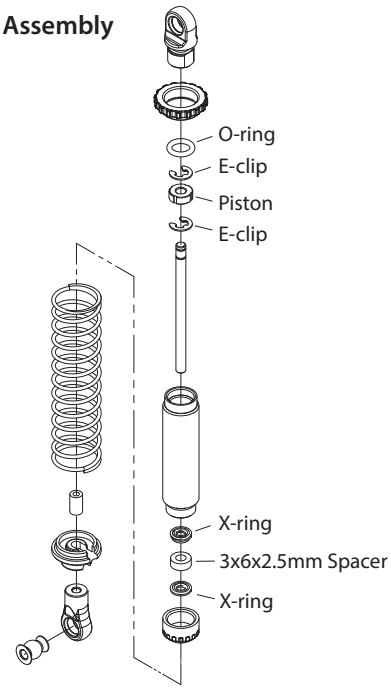

Replacing the shock oil

1. With the shock held upright, fully extend the shock shaft.
2. Fill the shock body with new silicone shock oil.
3. Move the piston up and down slowly to remove excess air, then let sit a few minutes until all bubbles are out.

Confirming final oil level

1. Compress the shock fully against the bump stop (A) and confirm the proper oil level (0.3mm above the top of the shaft) (B).
2. Add or remove oil if needed to reach the proper level.
3. Ensure the cavity in the upper shock cap (C) is dry and free of oil; screw on the shock cap.

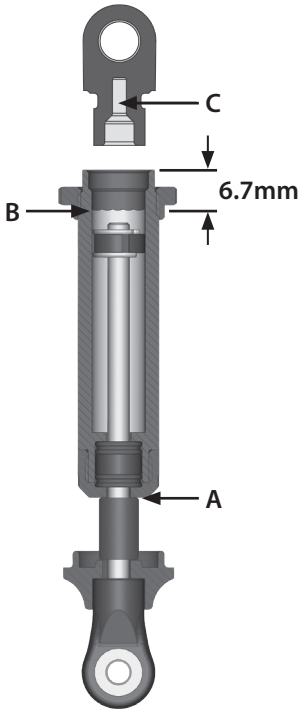

If you have questions or need technical assistance, call Traxxas at

1-888-TRAXXAS

(1-888-872-9927) (U.S. residents only)

TRAXXAS.com

Traxxas, 6250 Traxxas Way, McKinney, TX 75070, Phone: 972-549-3000, Fax: 972-549-3011, e-mail: support@Traxxas.com

KC2631-R01 Rev 260820