




Replacing the EZ-Start Lead (Blue) Wire

The EZ-Start blue lead wire (part#4581X) is a direct replacement for most models and is also used in place of the #4581 with bullet connector (no longer available). The #4581X is a single wire from the EZ-Start receptacle to the glow plug connector and does not use a bullet connector.

Follow these steps to replace the original blue wire with 4581X:

- Disconnect the blue lead wire from the glow plug on the engine.
- Follow the blue wire from the glow plug end to the white plastic EZ-Start receptacle. Locate the Molex[®] pin that the blue wire is attached to inside of the receptacle. On some models it may be necessary to remove the body mount or receptacle to access the blue wire.
- While pushing upward on the blue wire from below the receptacle, slide the brass pin extractor (included) over the Molex[®] pin and press downward on the extractor. The metal tabs on the Molex[®] pin will be squeezed in (fig A).
- Continue to press down on the extractor and pull the pin through the bottom of the receptacle (fig B).
- Discard the old blue wire.
- Push the pin of the new blue wire through the bottom of the receptacle into the same hole until the pin tabs lock the pin into place.
- Connect the other end to the glow plug and secure the blue wire to the other EZ-Start wires on the chassis. This completes the procedure.

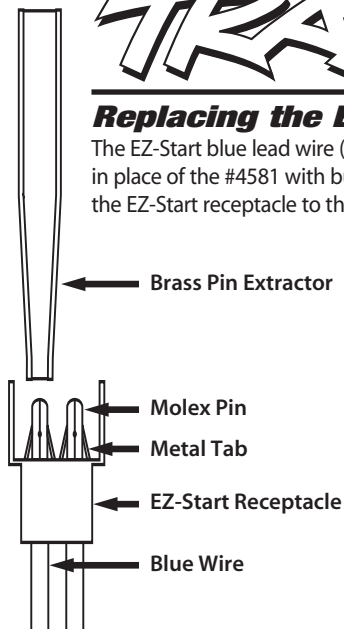


If you have questions or need technical assistance, call Traxxas at

1-888-TRAXXAS

(1-888-872-9927) (U.S. residents only)

Covers Part #4581X

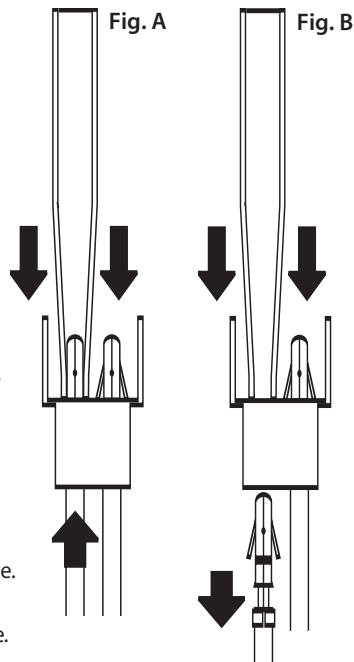

WWW.TRAXXAS.COM

Traxxas, 1100 Klein Road, Plano, TX 75074, Phone: 972-265-8000, Fax: 972-265-8011, e-mail: support@Traxxas.com